



WUZTRA®

CATALOG
2016





Content

L-CA11 L-A19



MR16 GU10



PAR-20/30/38 BR-20/30




L-DL-4/6/2.5



L-CA11


DIMMABLE

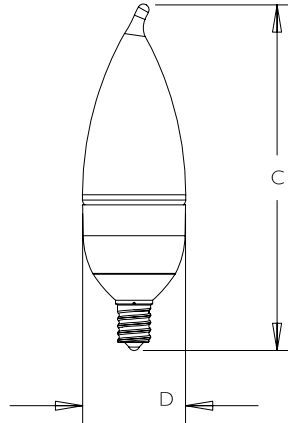

Item	D	C	D	C
PAR20	1.41"	4.76"	36mm	121mm



Item	Wattage	Power	P.F.	Base	Lumens	Kelvin	CRI	B.A.	CD	Dim	Lifetime	Replace	ENERGY STAR	UL
L-CA11-6W-DIM-300D-27K	6W	120V/60Hz	>0.7	E12/E26	520lm	2700K	>80	300°	N/A	•	25,000 h	60W		•
L-CA11-6W-DIM-300D-50K	6W	120V/60Hz	>0.7	E12/E26	520lm	5000K	>80	300°	N/A	•	25,000 h	60W		•

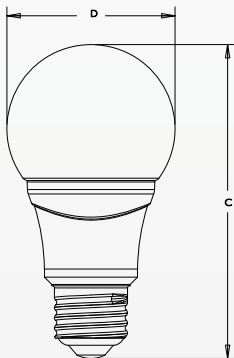


Item	D	C	D	C
L-A19	2.36"	4.4"	60mm	112mm

L-A19

DIMMABLE



Item	Wattage	Power	P.F.	Base	Lumens	Kelvin	CRI	B.A.	CD	Dim	Lifetime	Replace	ENERGY STAR	UL
L-A19-9W-DIM-240D-30K	9W	120V/60Hz	>0.7	E26	800lm	3000K	>80	240°	N/A	•	25,000 h	60W		•
L-A19-9W-DIM-240D-50K	9W	120V/60Hz	>0.7	E26	800lm	5000K	>80	240°	N/A	•	25,000 h	60W		•



Item	D	C	D	C
MR16	2"	1.89"	50mm	48mm


MR16
DIMMABLE



Item	Wattage	Power	P.F.	Base	Lumens	Kelvin	CRI	B.A.	CD	Dim	Lifetime	Replace	ENERGY STAR	UL
L-MR16-6W-DIM-38D-30K	6W	12V AC/DC	>0.9	GU5.3	400lm	3000K	>80	38°	900cd	•	25,000 h	35W	•	•
L-MR16-6W-DIM-38D-40K	6W	12V AC/DC	>0.9	GU5.3	400lm	4000K	>80	38°	900cd	•	25,000 h	35W	•	•
L-MR16-6W-DIM-38D-50K	6W	12V AC/DC	>0.9	GU5.3	400lm	5000K	>80	38°	900cd	•	25,000 h	35W	•	•




GU10
DIMMABLE

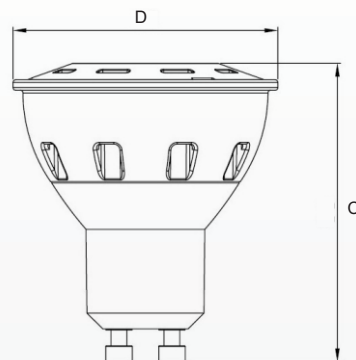

Item	D	C	D	C
GU10	2"	2.20"	50mm	56mm

Item	Wattage	Power	P.F.	Base	Lumens	Kelvin	CRI	B.A.	CD	Dim	Lifetime	Replace	ENERGY STAR	UL
L-GU10-6W-38D-30K	6W	120V/60Hz	>0.9	GU10	400lm	3000K	>80	38°	900cd	•	25,000 h	60W	•	•
L-GU10-6W-38D-40K	6W	120V/60Hz	>0.9	GU10	400lm	4000K	>80	38°	900cd	•	25,000 h	60W	•	•
L-GU10-6W-38D-50K	6W	120V/60Hz	>0.9	GU10	400lm	5000K	>80	38°	900cd	•	25,000 h	60W	•	•

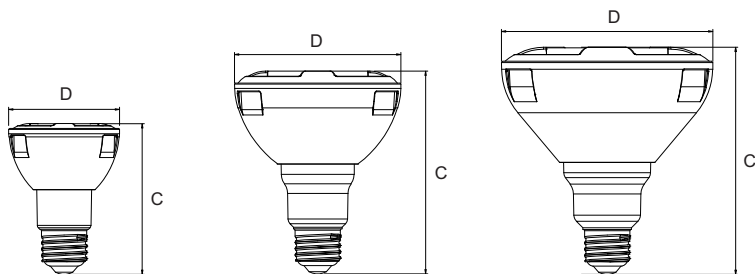

Item	D	C	D	C
PAR20	2.52"	3.43"	64mm	87mm
PAR30	3.78"	4.61"	96mm	117mm
PAR38	4.80"	5.15"	122mm	131mm

PAR 20
DIMMABLE



PAR 30
DIMMABLE



PAR 38
DIMMABLE




Item	Wattage	Power	P.F.	Base	Lumens	Kelvin	CRI	B.A.	CD	Dim	Lifetime	Replace	ENERGY STAR	UL
L-PAR20-7W-DIM-36D-30K	7W	120V/60Hz	>0.7	E26	550lm	3000K	>80	36°	1100cd	•	25,000 h	50W	•	•
L-PAR20-7W-DIM-36D-40K	7W	120V/60Hz	>0.7	E26	550lm	4000K	>80	36°	1100cd	•	25,000 h	50W	•	•
L-PAR20-7W-DIM-36D-50K	7W	120V/60Hz	>0.7	E26	550lm	5000K	>80	36°	1100cd	•	25,000 h	50W	•	•
L-PAR30-11.5W-DIM-40D-30K	11.5W	120V/60Hz	>0.8	E26	950lm	3000K	>80	40°	1800cd	•	25,000 h	75W	•	•
L-PAR30-11.5W-DIM-40D-40K	11.5W	120V/60Hz	>0.8	E26	950lm	4000K	>80	40°	1800cd	•	25,000 h	75W	•	•
L-PAR30-11.5W-DIM-40D-50K	11.5W	120V/60Hz	>0.8	E26	950lm	5000K	>80	40°	1800cd	•	25,000 h	75W	•	•
L-PAR38-15.5W-DIM-40D-30K	15.5W	120V/60Hz	>0.9	E26	1250lm	3000K	>80	40°	2400cd	•	25,000 h	100W	•	•
L-PAR38-15.5W-DIM-40D-40K	15.5W	120V/60Hz	>0.9	E26	1250lm	4000K	>80	40°	2400cd	•	25,000 h	100W	•	•
L-PAR38-15.5W-DIM-40D-50K	15.5W	120V/60Hz	>0.9	E26	1250lm	5000K	>80	40°	2400cd	•	25,000 h	100W	•	•

BR 30
DIMMABLE




BR 20
DIMMABLE

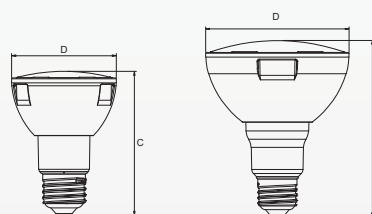

Item	D	C	D	C
BR20	2.48"	3.42"	63mm	87mm
BR30	3.78"	4.64"	96mm	118mm



Item	Wattage	Power	P.F.	Base	Lumens	Kelvin	CRI	B.A.	CD	Dim	Lifetime	Replace	ENERGY STAR	UL
L-BR20-7W-DIM-27K	7W	120V/60HZ	>0.8	E26	550lm	2700K	>80	100°	900cd	•	25,000 h	50W	•	•
L-BR30-12W-DIM-27K	12W	120V/60HZ	>0.9	E26	1000lm	2700K	>80	100°	900cd	•	25,000 h	75W	•	•



L-DL2.5

DIMMABLE



Item	D	C	D	C
L-DL2.5	3"	3.64"	78mm	92.6mm

Item	Wattage	Power	P.F.	Base	Lumens	Kelvin	CRI	B.A.	CD	Dim	Lifetime	Replace	ENERGY STAR	UL
L-DL-8W-DIM-36D-30K	8W	120V/60Hz	>0.9	N/A	600lm	3000K	>80	36°	1300cd	•	25,000 h	50W		
L-DL-8W-DIM-36D-50K	8W	120V/60Hz	>0.9	N/A	600lm	5000K	>80	36°	1300cd	•	25,000 h	50W		



L-DL4

DIMMABLE



L-DL6

DIMMABLE



Item	D	C	D	C
L-DL4	4"	2.95"	128mm	75mm
L-DL6	6"	3.30"	188mm	84mm



Item	Wattage	Power	P.F.	Base	Lumens	Kelvin	CRI	B.A.	CD	Dim	Lifetime	Replace	ENERGY STAR	UL
L-DL40-12W-DIM-1280-27K	12W	120V/60Hz	>0.9	E26	1000lm	2700K	>80	100°	NA	•	50,000 h	75W	•	•
L-DL56-15W-DIM-1680-27K	15W	120V/60Hz	>0.9	E26	1300lm	2700K	>80	100°	NA	•	50,000 h	100W	•	•

THD<20%

LUZTRA®

 info@luztra.net

W W W . L U Z T R A . N E T

